



# Dell Inspiron B130 RAM and Wireless Replacement

This guide will show you how to replace the RAM(Random Access Memory) for your Dell B130 laptop.

Written By: Patrick McNeil



## INTRODUCTION

RAM is very important for a computer to pull up information quickly and without referring to previous bytes of memory. The RAM in any computer wears out over time so this is actually a pretty common replacement if you have an older computer. The wireless aspect just means how it connects to wireless networks(Wifi) problems with this leave the computer with a slow internet connection or non at all when there should be one.




### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-






## Step 1 — Battery

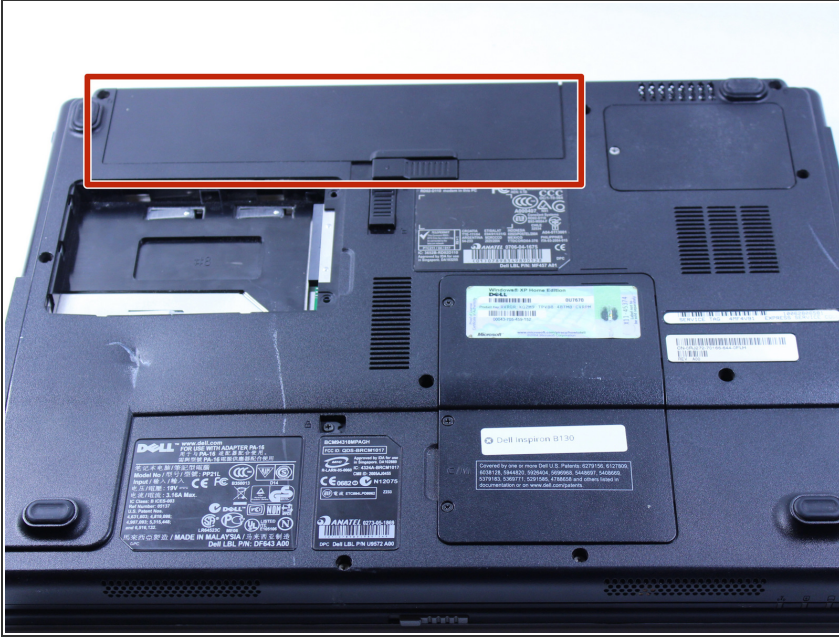

⚠ First, make sure your computer is turned off.


- Flip your computer over and you can see the battery.

## Step 2

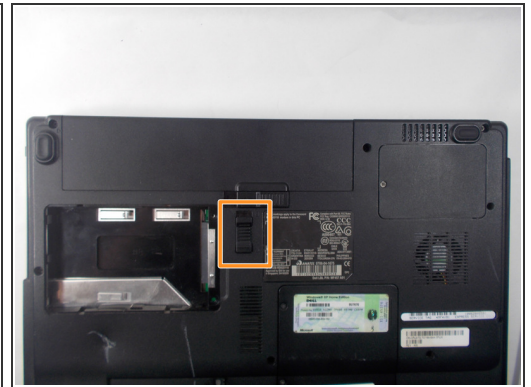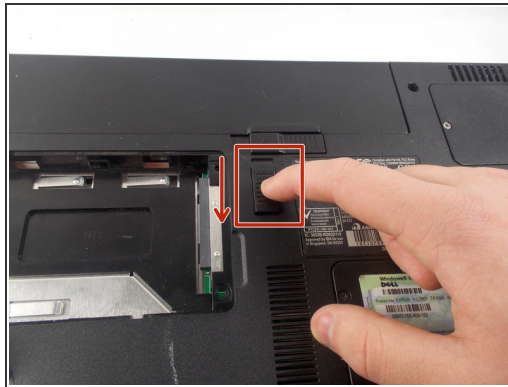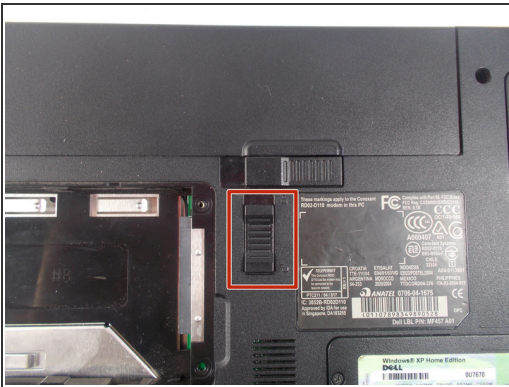


- Push the tab from the battery, downwards to unlock the battery.
- The tab should be in the position next to the unlocked indicator.

## Step 3

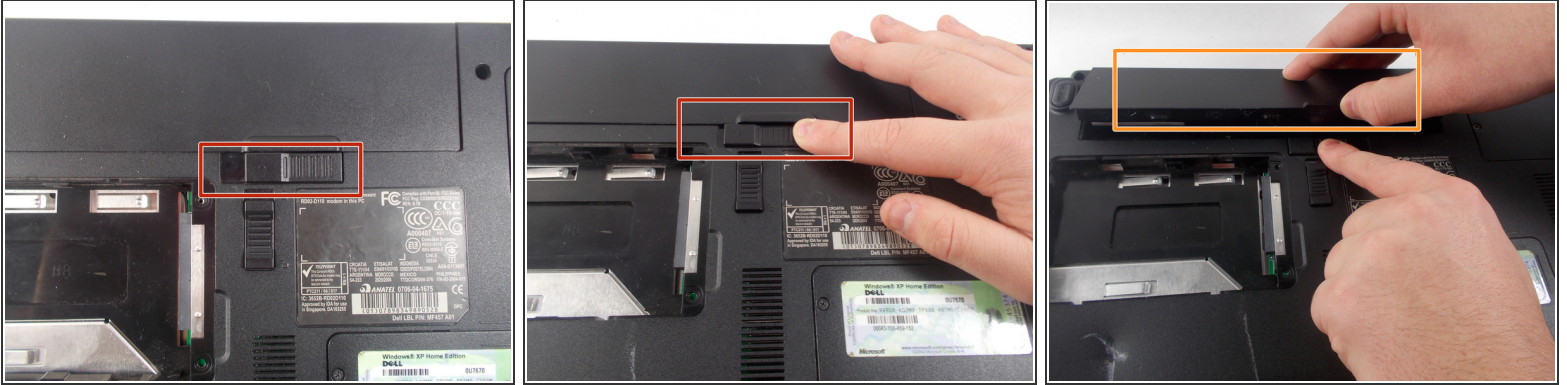

- Now, push the other tab (the one right under the battery) from right to left.
- Now the battery will be loose; lift the battery up and out of the computer.

## Step 4 — RAM and Wireless

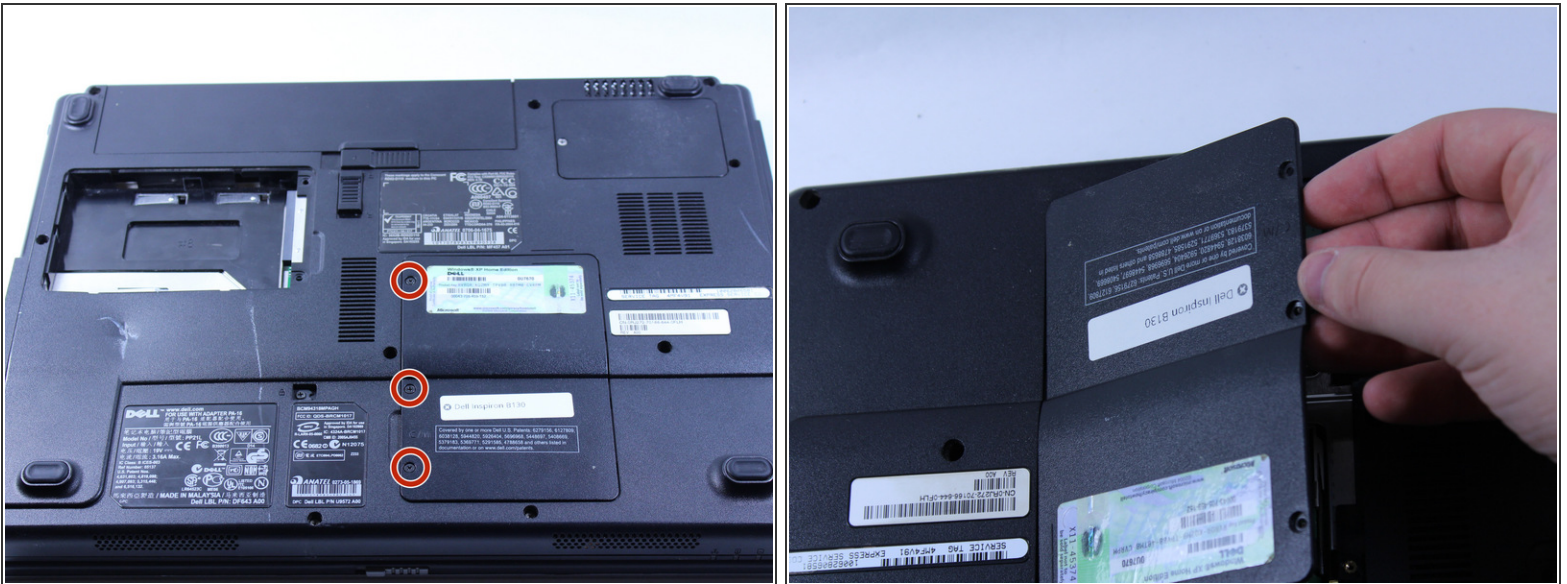

- Remove the three 6mm screws.
- Lift the plastic cover off to reveal the RAM and the Wireless.




## Step 5




- To remove the RAM, push outward against the metal brackets.
- The first RAM will pop up so you can just pull it right out.
- Repeat the first step again to remove the second RAM chip.
- Installation is the reverse of removal.

## Step 6

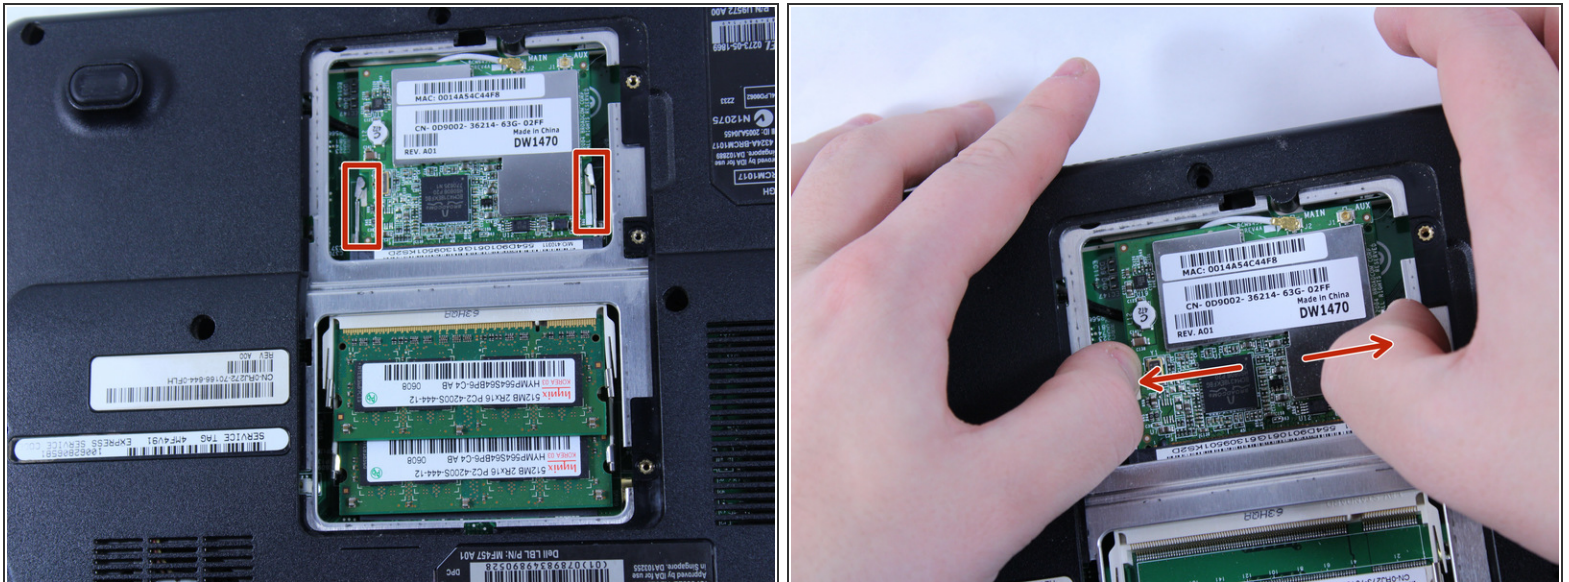

- To remove the wireless chip, push outward on its two metal brackets.
- ⚠ Do not remove the chip just yet, the wire that connects this chip must first be removed.

## Step 7

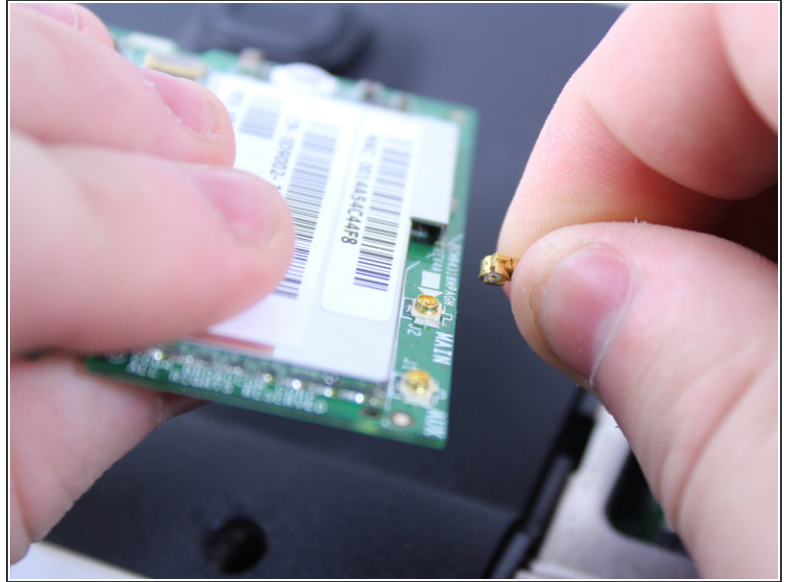

- To remove the wire, hold the wireless chip firmly and pull the connection straight up off of the chip.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 04:05:10 AM.